

# 2011 Toyota Sienna

## ABOUT THE VEHICLE



Make: Toyota

Model: Sienna

Year: 2011



Scosche App



## SCOSCHE®

### SPEAKER NOTES

#### Front Speakers:

Dash:	3 1/2"
Dash (Center):	3 1/2" (JBL only)
Pillar:	N/A
Upper Door:	N/A
Lower Door:	6 x 9"
Speaker Adapter:	SAT69
Speaker Harness:	SHTA02B

#### Dimensions:

Dash	Door
L: 2.75	L: 9.48
W: 2.75	W: 9.48
D: 2.14	D: 3.31

#### Rear Speakers:

Sliding Door:	3 1/2" (JBL only)
Side Panel (Forward):	6 3/4" (Non JBL)
Side Panel (Rear corner):	3 1/2" (JBL only)
Side Panel (Pass. cargo area):	10" JBL Sub
Speaker Harness:	TBA

#### Dimensions:

Sliding door (JBL)	Rear Corners (JBL)	Rear Side (Std.)
L: 3.199	L: 3.199	L: 6.00
W: 3.199	W: 3.199	W: 6.00
D: 1.436	D: 1.436	D: 2.20

### STANDARD/OPTIONAL EQUIPMENT

- AM/FM/RDS/MP3/WMA/SAT/Multi CD Player
- Navigation/DVD/Flip-down Wide Monitor (Split screen)
- 9 Speaker JBL Amplified system
- Bluetooth
- Steering Wheel Controls
- Back-Up Camera
- 3.5mm AUX/USB/Auxiliary 12V power outlets

### APPLICATIONS

Dash Type: New Custom Dash

Aftermarket Type: Single/Double DIN

#### Aftermarket Kit(s):

Aftermarket Kit: TA2107B

#### Harnesses/Interface Adapters:

STD. Radio Harness: TA02B

Interface (JBL prem.): TA07SR

Antenna Adapter: Not Required

BlueFusion/Bluetooth: BFTAK

AUX / iPod Interface: AXIPTA

#### Other:

Auxiliary / 3.5mm: Lower console

USB Input: Lower console (w/premium)

Factory Amplifier: Under Front Pass Seat

### FACTORY COLOR CODES

12v Battery (+): Lt. Blue

12v Accessory (+): Gray

12v Ground (-): Brown

12v Amp Turn On (+): Blue

Illumination: Green

Left Front Speaker (+): Pink

Left Front Speaker (-): Violet

Right Front Speaker (+): Green

Right Front Speaker (-): Light Blue

Left Rear Speaker (+): Black

Left Rear Speaker (-): Yellow

Right Rear Speaker (+): Red

Right Rear Speaker (-): White

### PRELIMINARY:

Disconnect the negative battery cable.

Make: Toyota

Model: Sienna

Year: 2011



Scosche App



### RADIO



1. Gently unscrew shift knob to remove.
2. With Panel Removal Tool, unclip trim piece along dash, below A/C climate controls between glove box and remove.
3. With Panel Removal Tool, unclip shifter panel, unplug and remove.
4. With Panel Removal Tool, unclip A/C/ controls panel, unplug and remove.
5. Extract (4) 10mm screws securing Radio, then with panel removal tool, unclip air vent panel, unplug and remove.

### DASH SPEAKERS



1. With Panel Removal Tool, unclip and remove speaker grill.
2. Extract (2) 10mm screws securing Speaker, unplug and remove.

### CENTER DASH (W/JBL)



1. With Panel Removal Tool, unclip and remove Speaker grill.
2. Extract (2) 10mm screws securing Speaker, unplug and remove.

### FRONT DOOR SPEAKERS



1. With Panel Removal Tool, unclip and remove side mirror panel.
2. With Pick Tool, unclip panel inside door handle and extract (1) Phillips Head screw revealed.
3. With Panel Removal Tool, unclip windows control panel, unplug, remove and extract (1) Phillips Head screw revealed..
4. Extract (1) Phillips head screw located the the outer paremiter of the door panel.
5. With Panel Removal Tool, unclip door panel, unplug and remove.
6. Extract (4) Phillips Head screws securing Speaker, unplug and remove.



### PRELIMINARY:

Disconnect the negative battery cable.

Make: Toyota

Model: Sienna

Year: 2011



Scosche App



### REAR DOOR (W/JBL)




1. Extract (1) T-25 Torx bit screw located in-front of the door handle.
2. With Panel Removal Tool, unclip window control panel, unplug and remove.
3. With Panel Removal Tool, unclip door panel, unplug and remove.
4. With Panel Removal Tool, unclip Speaker Harness from panel, Extract (2) Phillips Head screws securing speaker to panel and remove Speaker.

### REAR SIDE (Corner W/JBL)



1. With Panel Removal Tool, unclip sliding door running board and remove.
2. With Panel Removal Tool, unclip seatbelt screw cover and extract (1) 14mm bolt securing seatbelt.
3. With Panel Removal Tool, unclip (2) clamp covers where rear left strap is located.
4. Locate (3) tie downs on the tailgate's running board and With Panel Removal Tool, unclip plastic screw cover and extract (1) 10mm screw revealed.
5. With panel Removal Tool, unclip tailgate's running board and remove.
6. With Panel Removal Tool, unclip rear side panel and remove.
7. Extract (3) Phillips Head Screws securing Speaker adapter to side panel, unplug and remove.
8. Extract (2) T-20 Torx screws securing Speaker to Speaker adapter and remove.

### FACTORY AMPLIFIER ACCESS

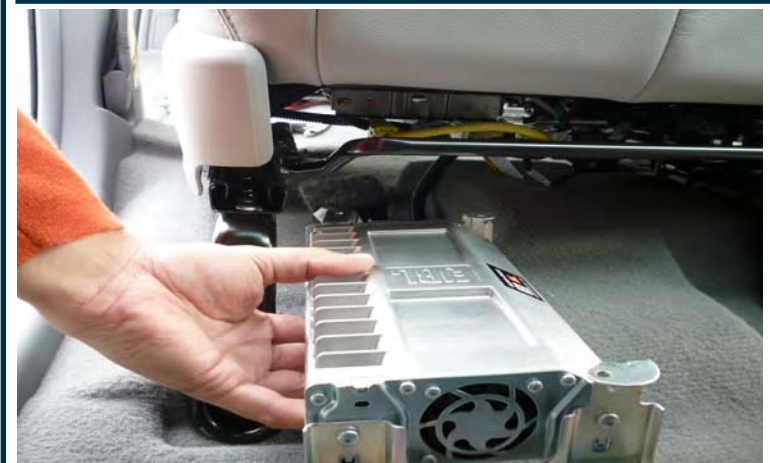

1. Extract (1) Phillips Head screw securing the front right side panel under the Passengers seat, unclip and remove.
2. With Panel Removal Tool, unclip (3) Plastic clips securing amplifiers cover and remove cover.
3. Extract (3) 10mm screws securing amplifier, unplug and remove.

### PRELIMINARY:

Disconnect the negative battery cable.

Make: Toyota  
Model: Sienna  
Year: 2011



### SAT TUNER/SUB



1. Remove the jack access door.
2. Remove the jack and lug wrench.
3. Remove jack bracket by extracting (3) 10mm screws.
4. Extract (3) 10mm screws securing Satellite Radio and slide out.
5. With Panel Removal Tool, unclip (3) plastic clips securing Satellite Radio harness cover, unplug and remove.

### SUBWOOFER (Continue with Side panel removal)

1. With Panel Removal Tool, unclip sliding door running board and remove.
2. With Panel Removal Tool, unclip seatbelt screw cover and extract (1) 14mm bolt securing seatbelt.
3. With Panel Removal Tool, unclip (2) clamp covers where rear left strap is located.
4. Locate (3) tie downs on the tailgate's running board and with Panel Removal Tool, unclip plastic screw cover and extract (1) 10mm bolt revealed.
5. With panel Removal Tool, unclip tailgate's running board and remove.
6. With Panel Removal Tool, unclip rear side panel and remove.
7. Extract (4) bolts securing enclosure, unplug and remove.

### REAR SIDE PANEL (STD.)



1. Carefully pull off the portion of the rubber door edge seal where it makes contact with edge of the rear plastic side panel.
2. With Panel Removal Tool, unclip sliding door running board and remove.
3. With Panel Removal Tool, unclip seatbelt screw cover and extract (1) 14mm bolt securing seatbelt (in floor near edge of side panel).
4. Use a pick tool to remove small SRS Airbag logo to reveal (1) 10mm bolt behind. Remove bolt.
5. Use a Panel Removal Tool, carefully pry the front portion of the rear side panel to gain access to the factory speaker.
6. Extract (3) 10mm bolts securing Speaker/adaptor assembly, unplug and remove.