

2002/03

**Nissan Xterra
SUV**



Year: 2002

Make: Nissan

Model: Xterra

IN-DASH APPLICATION:

Dash Type: ISO DbIDIN With Pocket Option

Kit: NN2155

Harness: NN03

Antenna: Standard

FRONT SPEAKERS:

Side Mirror: 1 ¼"

Door: 6 ½" 4-Hole Standard

REAR SPEAKERS:

Rear Door: 6 x 9" 4-Hole Standard

WIRE COLOR CODES:

+12V Constant	=	Red/Yellow
+12V Accessory Switched	=	Green/Red
-12V Chassis Ground	=	Chassis
+12V Illumination	=	Blue/Red
LF+	=	Blue/Silver Bots
LF-	=	Black/White
RF+	=	Brown/Silver Bots
RF-	=	Black/Red
LR+	=	Light Green
LR-	=	Black/Yellow
RR+	=	Orange
RR-	=	Black/Pink

2002/03 Nissan Xterra 4 Door Sport Utility

PRELIMINARY: Disconnect the negative battery cable.

ANTENNA: The factory antenna is located atop the right front fender panel.

RADIO REMOVAL AND IN-DASH INSTALLATION:

NOTE: THE FACTORY RADIO PROVISION IS FOR A DOUBLE ISO/DIN RADIO. AN INSTALLATION KIT IS NECESSARY WHEN INSTALLING AN AFTERMARKET RADIO. WE RECOMMEND THE USE OF A SCOSCHE IM2120 KIT FOR SHAFT OR DIN MOUNT APPLICATIONS, OR A SCOSCHE TN2150 FOR ISO MOUNT APPLICATIONS.

1. Remove gear shift knob and pry up gear shift bezel and pull off to side.
2. Extract (2) Philips head screw from bottom of radio bezel and (2) from above radio, Remove bezel.
3. Extract (4) screws securing radio, disconnect and remove.



FRONT DOOR SPEAKER INSTALLATION:

NOTE: THE FACTORY SPEAKER PROVISION IS FOR A 7" 4-HOLE PIN CUSHION SPEAKER MOUNTED TO A FACTORY SPEAKER ADAPTER. WHEN MOUNTING AN AFTERMARKET 5 1/4" OR 6 1/2" SPEAKER, A SPEAKER ADAPTER IS NEEDED. WE RECOMMEND THE SCOSCHE SAC656 OR SAU56 SPEAKER ADAPTER.


1. Remove (1) push clip on top of door panel by side mirror bezel.
2. Extract (1) Phillips head screw from inside door release cup.
3. Unsnap trim around door release, lift away and remove.
4. Lift away rear section and extract (1) 10mm bolt from behind.
5. Lift away front section and extract (1) 10mm bolt from behind.
6. Disconnect the armrest and remove.
7. Using a panel removal tool, unsnap the door panel fasteners around the perimeter of the door panel, lift away and remove.
8. Extract (4) Phillips head screws securing speaker, lift away, disconnect and remove.



REAR SIDE PANEL SPEAKER INSTALLATION:

Note: The factory speaker provision is for a Standard 6x9" speaker. When mounting an aftermarket 5 1/4" or 6 1/2" speaker, a speaker adapter is needed. We recommend the Scosche SA69 speaker adapter.

1. Unsnap plastic door runner from cargo door, lift away and remove.
2. Extract (1) plastic fastener from side trim.
3. Remove cargo cover and extract (1) Phillips head screw from cargo cup.
4. Unsnap seat latch trim bezel, lift away and remove.
5. Extract push pin fastener at the top front edge of side panel, on top of the rear fender well.
6. Extract push pin fasteners holding side panels, lift away and remove panel (If cigarette lighter is available disconnect).
7. Extract (4) Phillips head screws securing speaker, lift away, disconnect and remove.

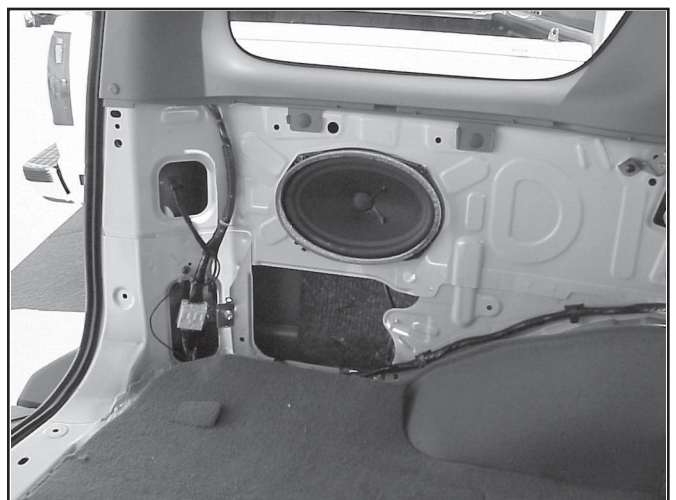

NOTE: THIS MANUAL IS BASED ON CAREFULLY DOCUMENTED RESEARCH. ABSOLUTE ACCURACY IS ATTEMPTED BUT NOT GUARANTEED. USE THIS MANUAL AS A REFERENCE GUIDE. SCOSCHE, INC CANNOT BE RESPONSIBLE FOR INCONSISTENCIES THAT MAY OCCUR.

©2003 SCOSCHE INDUSTRIES, INC. ALL RIGHTS RESERVED
FOR MORE INFORMATION VISIT www.scosche.com
OR CALL SCOSCHE INDUSTRIES, INC. AT 800-363-4490