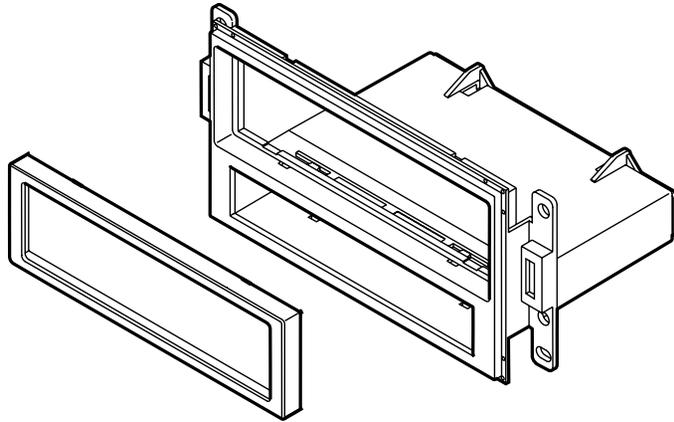


2004-UP PONTIAC GRAND PRIX KIT

Thank you for purchasing the Scosche GM1585 Kit. This kit was manufactured with the highest of quality standards.

NOTES:

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

WIRE CODES

For Factory Wiring Codes go to: www.scosche-cars.com, or call

STEREO INSTALLATION

1. Carefully remove the ring around the ignition switch.
2. Using a panel removal tool, carefully pry the dash panel surrounding the radio and A/C controls off.
3. Disconnect all connectors attached to the panel and remove.
4. Extract (4) 9/32 bolts holding the radio, (2) 9/32 bolts holding the A/C controls, and (2) 9/32 bolts holding the lower pocket and remove.
5. The radio will come out separated from the A/C controls and pocket.

LIABILITY DISCLAIMER


This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit in the listed vehicles. Manufacturer cannot be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions call:

© 2004 SCOSCHE INDUSTRIES, INC.

TECH HELP 1-800-621-3695x3

SI 6/04-GM1585 (3000003)

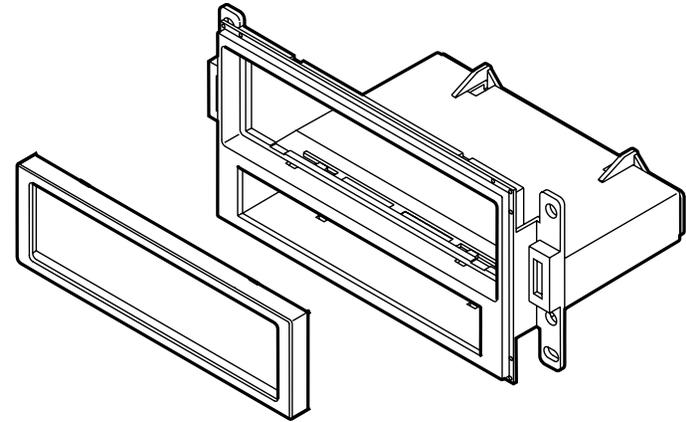2004-UP PONTIAC GRAND PRIX KIT

Thank you for purchasing the Scosche GM1585 Kit. This kit was manufactured with the highest of quality standards.

NOTES:

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo/cassette player for proper wiring and mounting instructions.

WIRE CODES

For Factory Wiring Codes go to: www.scosche-cars.com, or call

STEREO INSTALLATION

1. Carefully remove the ring around the ignition switch.
2. Using a panel removal tool, carefully pry the dash panel surrounding the radio and A/C controls off.
3. Disconnect all connectors attached to the panel and remove.
4. Extract (4) 9/32 bolts holding the radio, (2) 9/32 bolts holding the A/C controls, and (2) 9/32 bolts holding the lower pocket and remove.
5. The radio will come out separated from the A/C controls and pocket.

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit in the listed vehicles. Manufacturer cannot be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions call:

© 2004 SCOSCHE INDUSTRIES, INC.

TECH HELP 1-800-621-3695x3

SI 6/04-GM1585 (3000003)