


IN-DASH INSTALLATION KIT FOR 2016-UP HONDA CIVIC LX ISO DOUBLE DIN W/POCKET

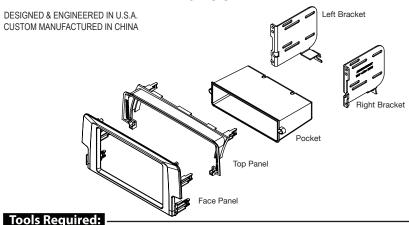

roois neganieur

- PRT (Panel Removal Tool)
- Screwdriver

INTRODUCTION/PRELIMINARY

This premium installation kit is for 2016-Up Honda Civic vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION: DISCONNECT YOUR VEHICLE NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES •

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.



IMPORTANT!

DO NOT RETURN PRODUCT TO THE RETAILER

IF YOU NEED ASSISTANCE OR REPLACEMENT PARTS CALL US TOLL FREE: 1800-621-3695 X3 HOURS: MON-FRI 8AM-5:30PM (PST) SATURDAY 8AM-2PM (PST)

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile disassembly, wire harness/codes and information pertaining to the installation of this kit. Scosche Industries, Inc. cannot be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions, call our toll free technical help line at:

1-800-621-3695x3

Step 1

Disassembly

OEM head unit: Honda Civic 2016



Step 2

Disassembly

Using a Panel Removal Tool remove the two side trim panels on the center console next to the shifter, see before image below.





Step 3

Disassembly

Using a panel removal tool unsnap the passenger airbag/climate control module from the dash, then unplug and remove.





Step 4


Unscrew (2) 10mm screws exposed securing the radio to the dash see image on right.



Step 5

Disassembly

- 1. Unsnap two clips below the radio securing harnesses (Photo1).
- 2. Unplug and remove the radio unit from its location (Photo2).






INSTALLATION GUIDE


Single DIN Assembly


Step 6


Single DIN Assembly

- **6.1** Using the provided (4)screws mount the provided top trim panel to the back of the HA2157B face panel.
- **6.2** Using the (2)pocket screws provided with the kit, mount and secure the pocket to the back of the face panel
- **6.3** Next, assemble both left and right brackets to the back of the face panel/pocket assembly with the (4)bracket screws provided with the kit.
- **6.4** Slide the single DIN radio through the backside of the panel assembly and screw into place.












Step 7

Assembly

- **7.1** Using the provided (4)screws mount the provided top trim panel to the back of the HA2157B face panel.
- **7.2** Next, assemble both left and right brackets to the back of the face panel/pocket assembly with the (4)bracket screws provided with the kit.
- **7.3** Slide the single DIN radio through the backside of the panel assembly and screw into place.





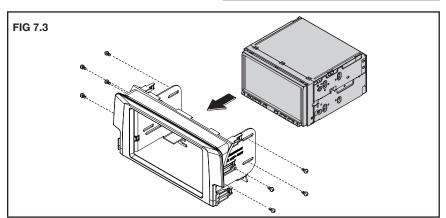

INSTALLATION GUIDE

Reassembly

Step 8

Reassemble Connect

everything with the new aftermarket panel in reverse order.

In order to complete the installation process for your new kit, you must first reassemble everything in reverse order of disassembly. Connect all wires and place the assembly kit/radio unit back into the radio dash cavity.