

LIMITED WARRANTY

Scosche Industries Inc. warrants this product to be free from defects in material and workmanship for a period of 1 year from purchase. This Scosche product is sold with the understanding that the purchaser has independently determined the suitability of this product. This warranty is offered to the original purchaser of the product only. This warranty does not cover the product if physically damaged, subject to negligence or misuse, abuse, alteration, accident, or an act of GOD. This warranty does not apply to product which has water or physically damaged by accident or which has been misused, disassembled or altered.

The original dated sales slip or proof of purchase will establish warranty eligibility. If the product should prove defective within the warranty period, return the product with proof of purchase to Scosche Industries Inc. Scosche, at its option, will replace or repair the product free of charge and return the product postage paid.

In no event shall Scosche Industries, Inc. be responsible for claims beyond the replacement value of the defective product, or in any way be liable or responsible for consequential or incidental damages. No express warranties and no implied warranties, whether of fitness or any particular use or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Scosche. Scosche Industries cannot be held responsible for discrepancies/inconsistencies that may occur due to automotive manufacturing changes or option.

Register your product online at

www.scosche.com/register




SCOSCHE

PBJQC

POWER-UP QUICK CONNECT

Quick Connect Battery Leads w/ SAE Adapter

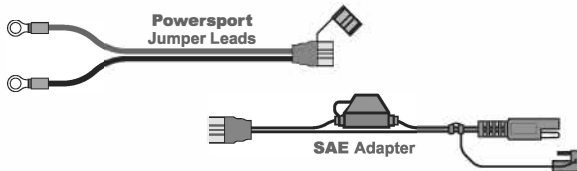

JUMP STARTING WARNINGS

- Do not touch the Red & Black clamps together or connect to the same piece of metal.
- Do not use the jump start cable for any other purpose other than jump starting the vehicle.
- Always confirm that jumper clamps are well connected and polarities are not crossed.
- Keep clear of battery when jump starting the vehicle.
- Use in well-ventilated area.
- Make sure the vehicle's ignition is off before making cable connections.

SAFETY WARNINGS: Failure to obey the safety warnings may result in electrical fire, electrical shock and damage to your vehicle.


- Always handle product with care.
- Do not use as toy and keep away from children.
- If product appears abnormal in shape, immediately stop usage and disconnect all devices.
- Do not allow product to become wet.
- Do not modify or disassemble the **PBJQC**.
- The PBJQC is water resistant, but **DO NOT** submerge or pressure wash.
- Do not expose the product to extreme heat.



IMPORTANT!
DO NOT RETURN PRODUCT TO THE RETAILER

IF YOU NEED ASSISTANCE OR REPLACEMENT PARTS
CALL US TOLL FREE: 1-800-363-4490 x1

HOURS MON-FRI 8AM-5:30PM (PST) SATURDAY 8AM-2PM (PST)

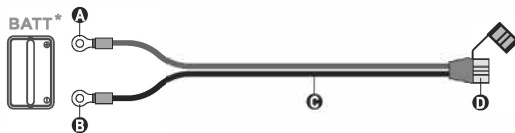

- A.** Positive Ring Terminal (Red)
 - B.** Negative Ring Terminal (Black)
 - C.** Powersport Jumper Leads
 - D.** 3-Pin EC5 Female Connector w/ Weatherproof Cap
- * Battery Not Included


1. Connect ring terminals to battery posts or screws. The red cable is the positive lead (A). The black cable is the negative lead (B).
2. Carefully route the weatherproof 3-Pin EC5 connector to a location that will be accessible when you need to jump start the vehicle (C,D). Secure the cables to the vehicle along the way using the included cable ties.

***TAKE EXTREME CARE TO ROUTE THE LEADS AS FAR AWAY FROM EXHAUST OR OTHER HIGH-TEMP COMPONENTS. ENSURE CABLES WILL NOT BE SUBJECT TO ABRASION OR PINCH POINTS WHEN THE VEHICLE IS UNDERWAY.**

3. If you need to jump start the vehicle, simply remove the protective cap from the jumper leads (D) and connect them to your Scosche PBJ300 or PBJ700 (sold separately). Follow the instructions provided with your Scosche Portable Battery Jumper to jump start the vehicle. After this installation you will never have to fumble around with traditional battery clamps.


TECH SUPPORT

If you have any questions or need technical assistance with the installation, or the most current application please call or visit us on the web at:
(800) 363-4490 x1 | www.scosche.com/contact



- E.** 3-Pin EC5 Male Connector
- F.** SAE Adapter Leads
- G.** 7.5 AMP Fuse
- H.** SAE Connector
- I.** SAE Positive Polarity
- J.** SAE Negative Polarity
- K.** SAE Cap/Plug

1. If you have a trickle charger/battery tender that pushes at a rate of less than 7.5 amps, and has a 2-Pin SAE connector, you can use the included SAE Adapter (diagram above) to connect your existing trickle charger/battery tender to your previously-installed Powersports Jumper Leads.



***THERE ARE MANY DIFFERENT TRICKLE CHARGERS/BATTERY TENDERS ON THE MARKET. SOME ARE BUILT TO HIGHER SAFETY STANDARDS THAN OTHERS. SCOSCHE HAS BUILT IN A 7.5A FUSE TO MITIGATE CHARGER FAILURE, BUT WILL NOT BE HELD LIABLE FOR ANY INJURY, DEATH, OR DAMAGE TO PROPERTY AS A RESULT OF FAILURE OF A THIRD PARTY CHARGER.**

NOTE: The exposed pin on the SAE connector is the negative contact. Before making your connections, ensure that the polarity of trickle charger matches.

