


AQUA MARINE COVER

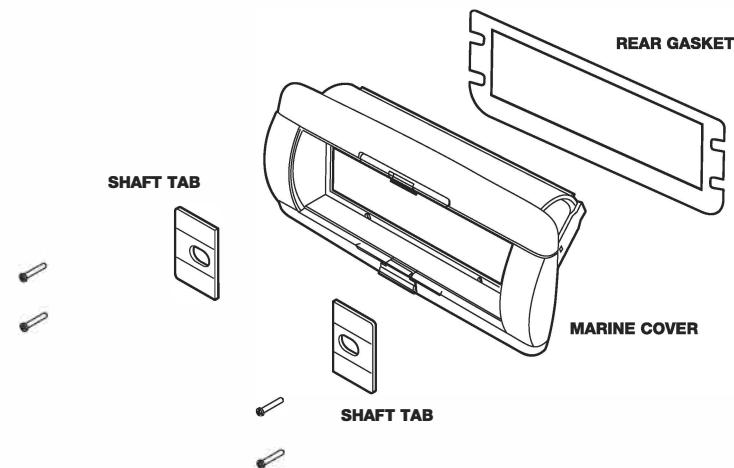

INTRODUCTION

The Scosche Marine Cover has been designed for the marine environment. When the cover is closed it provides protection for your aftermarket stereo. The cover provides quick and easy stereo accessibility. The Scosche Marine Cover works with most Shaft and Din style stereos.

PARTS LIST

- | | |
|-----------------------|-----------------------------|
| (1) Aqua Marine Cover | (4) 1" Phillips head screws |
| (2) Shaft tabs | (1) Drilling template |
| (1) Rear gasket | (1) Instruction manual |
| (4) Mounting clips | |

LIMITED WARRANTY

Scosche Industries Inc. warrants this product to be free from defects in material and workmanship for a period of 90 days from purchase. This Scosche product is sold with the understanding that the purchaser has independently determined the suitability of this product. This warranty is offered to the original purchaser of the product only. This warranty does not cover the product if physically damaged, subject to negligence or misuse, abuse, alteration, accident, or an act of GOD. This warranty does not apply to product which has water or physically damaged by accident or which has been misused, disassembled or altered.

The original dated sales slip or proof of purchase will establish warranty eligibility. If the product should prove defective within the warranty period, return the product with proof of purchase to Scosche Industries Inc. Scosche, at its option, will replace or repair the product free of charge and return the product postage paid.

In no event shall Scosche Industries, Inc. be responsible for claims beyond the replacement value of the defective product, or in any way be liable or responsible for consequential or incidental damages. No express warranties and no implied warranties, whether for fitness or any particular use or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Scosche. Scosche Industries cannot be held responsible for discrepancies/inconsistencies that may occur due to automotive manufacturing changes or option.



IMPORTANT!

*Do Not Return Product
to the Retailer!*

IF YOU NEED ASSISTANCE OR REPLACEMENT PARTS

Call us FIRST at ...

1-800-621-3695 ext 3

Toll Free, No-Charge tech support

• FRIENDLY CUSTOMER
SERVICE TECHNICIANS
• YOU WON'T BE ON HOLD
LONGER THAN 5 MINUTES


OUR HOURS ARE:

Monday - Friday 8:00 a.m. to 5:30 p.m. (PST)
Saturday 8:00 a.m. to 2:00 p.m. (PST)

INSTALLATION

DIN UNIT INSTALLATION

1. Using the supplied drilling template, trace the opening and drilling location outline onto the proper mounting location. Cut out and drill the proper openings.
- Note:** The mounting screws require a 3/32" drilled hole.
2. With the hole opening cut, take the Marine Cover and do a test fit to make sure the door opens properly.
3. Position the rear gasket onto the backside of the Marine Cover, remove the backing and attach the adhesive side to the backside of the Marine Cover.
4. Using the supplied Phillips head screws, attach the Marine Cover base to the pre-cut opening.
5. Insert the stereo's mounting sleeve in the opening of the base. Secure the mounting sleeve to the mounting surface by bending the tabs outward (see Figure 1).
6. Connect the stereo wiring harness to the boat. Insert the stereo into the sleeve, making sure the stereo locks into place properly.

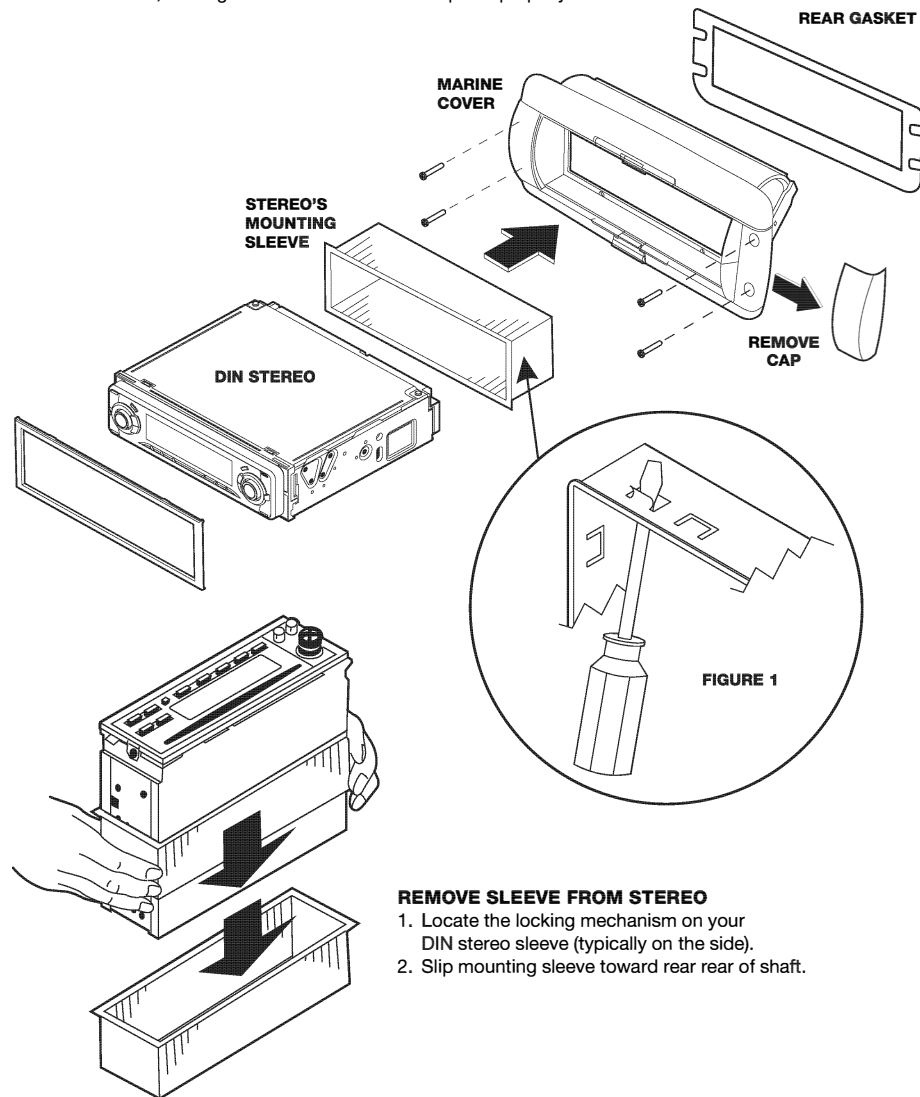

INSTALLATION (cont'd)

SHAFT UNIT INSTALLATION

1. Using the supplied drilling template, trace the opening and drilling location outline onto the proper mounting location. Cut out and drill the proper openings.
- Note:** The mounting screws require a 3/32" drilled hole.
2. With the hole opening cut, take the Marine Cover and do a test fit to make sure the door opens properly.
3. Position the rear gasket onto the backside of the Marine Cover, remove the backing and attach the adhesive side to the backside of the Marine Cover.
4. Insert the shaft tabs into the Marine Cover, (see Figure 2).
5. Mount the stereo to the base using the mounting shaft tabs.
6. Connect the stereo wiring harness to the boat, and slide the stereo and base into the pre-cut opening.
7. Using the supplied Phillips head screws, attach the Marine Cover, with the shaft stereo mounted to it, to the pre-cut opening.

