


CR1293B

IN-DASH STEREO INSTALLATION KIT FOR 2011-UP JEEP GRAND CHEROKEE

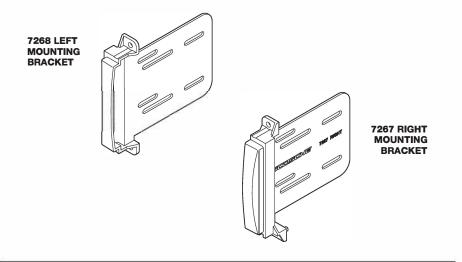

INTRODUCTION/PRELIMINARY

This premium installation kit is for select 2011-Up Jeep Grand Cherokee vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION

DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.

CAR STEREO CONNECTORS		S3-1	
PROVIDE EASY CONNECTION OF FACTORY WIRING HARNESS.	YOUR CAR STEREO TO		
S3-1 Stereo Replacement Interface with Steering Wheel Control		innin .	
S3CRO4B (not shown) Harness Connector	VWA3 Antenna Adapter	a me	VWA3

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire hamess/codes and information pertaining to installation of this kit (CR1293B) in select 2011-Up Jeep Grand Cherokee. Scosche Industries, Inc. cannot be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions, call our toll free technical help line at: 1-800-621-3695x3

FACTORY STEREO REMOVAL

2011-UP JEEP GRAND CHEROKEE

RADIO REMOVAL:

1. Use a panel removal tool to carefully pop the radio/vent dash panel, unplug and remove.

2. Extract (4) 7mm screws holding radio, unplug and remove.

MOUNTING THE STEREO

Secure left & right brackets to stereo using screws supplied with the aftermarket stereo.

