




PSM11020

TerraClamp™

MAGICMOUNT™ MIRROR MOUNT

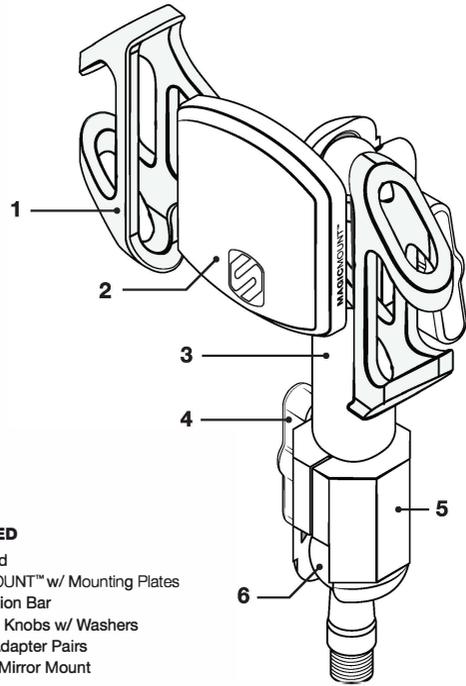

PARTS INCLUDED

1. (1) Elastic Band
2. (1) *MAGICMOUNT™ w/ Mounting Plates
3. (1) 1.5" Extension Bar
4. (2) Adjustment Knobs w/ Washers
5. (2) Mounting Adapter Pairs
6. (1) Pivot Joint Mirror Mount

***Caution:** This magnetic mount is not a toy. The small magnets are harmful if swallowed. Keep out of reach of children.

WARNING: Do not use the magnetic mount with any hard-drive based devices such as iPod classic, iPod video and Zune players.

IMPORTANT!

DO NOT RETURN PRODUCT TO THE RETAILER


IF YOU NEED ASSISTANCE OR REPLACEMENT PARTS CALL US TOLL FREE: 800-363-4490 x1
HOURS: MON-FRI 8AM-5:30PM (PST) SATURDAY 8AM-2PM (PST)

MOUNTING THE MAGICPLATE™


OPTION 1 (small or large plate)
Attach adhesive side of metal plate directly to device



OPTION 2 (small or large plate)
Attach adhesive side of metal plate directly to back of case



OPTION 3 (large plate only)
Attach adhesive side of metal plate to interior of case, between device and inside of case. Plate will adhere to magnetic mount through rear panel of case.

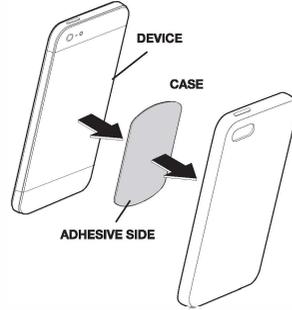

NOTE: If you choose not to attach the metal plate to the device or case please leave the adhesive backing in place. Position the plate between the device and interior of case with the metal surface facing the case.

MAGICPLATE™ PLACEMENT



For Typical Smartphones



For Wireless Charging Qi-enabled Smartphones

REMOVING THE MAGICPLATE™

Use a thin plastic card to carefully lift the plate's adhesive surface from the mounting surface. Slowly lift up and remove the plate.

ASSEMBLY

*** NOTE:** For a stable and secure riding experience we recommend using the provided elastic band when mounting the device to a mobile application. Use Non-elastic band option on stationary applications **ONLY**

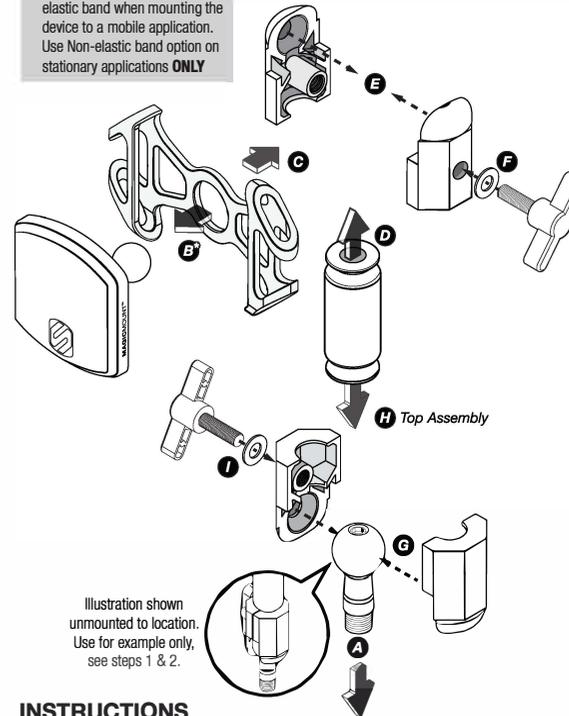


Illustration shown unmounted to location. Use for example only, see steps 1 & 2.

INSTRUCTIONS

1. Select and remove either the left or right mirror, this will be your mounting location. **Note: Check your local and state laws before removing mirror and installing.**
2. Mount and secure the mirror bolt mount onto desired location (A).
3. Insert **MAGICMOUNT™** ball into the elastic center ring & hook into place (B*).
4. Mount the ball of the magnetic assembly (C) & the bar extension (D) to the two adapters (E).
5. Secure the assembly using the screw and washer provided (F).
6. Align the two lower adapters to the mounted ball from step one (G) along with the top assembly (H).
7. Secure the assembly using the screw and washer provided (I), see bottom assembly illustration for sample result.


For complete warranty details, please visit us at www.scosche.com or call (800) 363-4490

SET-UP GUIDE

Elastic Band


With the metal plate positioned onto the device, align the elastic band with your device and attach to the corners of your device as shown (A). The elastic band will secure your device while riding.

NOTE: Elastic band can be positioned horizontally or vertically

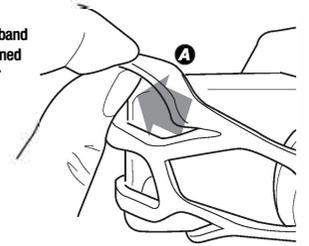

MAGICMOUNT™ Adjustment


Loosen knob (B) to reposition the angle (C) of the magnetic mount head. Once the position is set, tighten the knob (B) to secure the angle.

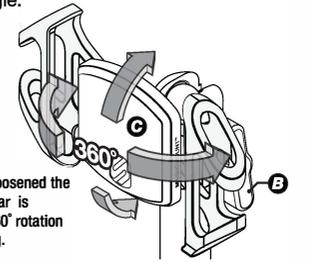

NOTE: When loosened the angle of the bar is capable of 360° rotation for positioning.

Bolt Mount Adjustment

Loosen knob (D) to reposition the angle (E) of the bolt mount and bar extension. Once the position is set, tighten the knob (D) to secure the angle.

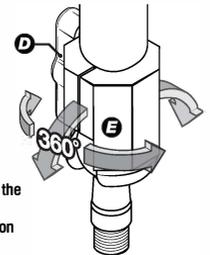

NOTE: When loosened the angle of the bar is capable of 360° rotation for positioning.